



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 3/06, H04B 7/26	A1	(11) International Publication Number: WO 99/50985 (43) International Publication Date: 7 October 1999 (07.10.99)
(21) International Application Number: PCT/SE99/00504 (22) International Filing Date: 26 March 1999 (26.03.99) (30) Priority Data: 9801092-9 30 March 1998 (30.03.98) SE (71) Applicant: TELIA AB (publ) [SE/SE]; Mårbackagatan 11, S-123 86 Farsta (SE). (72) Inventor: BENGTTSSON, Roger; Båbyggaragatan 176, S-216 42 Malmö (SE). (74) Agent: PRAGSTEN, Rolf; Telia Research AB, Vitsandsgatan 9, S-123 86 Farsta (SE).		(81) Designated States: EE, LT, LV, NO, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: METHOD AND ARRANGEMENT FOR SYNCHRONISATION AT A MOBILE RADIO COMMUNICATIONS SYSTEM		
<p>The diagram illustrates a mobile radio communications system. It features two RF Terminals on the left, each with an antenna. Four GPS units are positioned at the top, each with an antenna. An RF Base Station is located on the right, also with an antenna. Solid arrows labeled 'Communication' show bidirectional links between the RF Terminals and the RF Base Station. Dashed lines, labeled 'Frequency locking', connect the antennas of the RF Terminals and the RF Base Station to the antennas of the four GPS units, indicating a synchronization or frequency-locking relationship between the ground-based stations and the satellite navigation system.</p>		
(57) Abstract <p>The invention relates to a method and an arrangement at a mobile radio communications system which includes at least one base station and at least one radio terminal, and which makes possible frequency locking of the oscillator frequency in the base station, respective the radio terminal, to a global satellite frequency.</p>		

base station to terminal (downlink), and from terminal to base station (uplink). It consequently also is possible to use coherent detection in the uplink, thanks to phase locking of the reference frequencies, which further
5 contributes to better system performance.

It should be realised that if ATM shall be transported over radio, the bit error contents must be very low, because ATM is designed for reliable media. If the bit error content for instance exceeds 10^{-5} , then
10 retransmissions will reduce the data rate for transmissions considerably, because retransmissions will be more and more dominating. The same is true if IP-data is transported, at which, at too high bit error content, the retransmissions will have a significant influence. Radio systems for data
15 traffic therefore shall be designed for bit error contents of 10^{-8} - 10^{-11} after encoding.

The system arrangement with frequency and phase locking of the reference frequencies in the terminals and base stations of the communications system is shown in
20 Figure 1. The communications system is characterised in that synchronisation is made via a global satellite system with time and frequency references, whereas interactive transmission of wanted information is made via the terrestrial radio access network. The system is also
25 possible to use for one-way terrestrial distribution of, for instance, digital TV according to DVB.

The invention is principally intended for stationary outdoor systems, but can also be used indoors if the receiver suitably located, or if a GPS-repeater is used,
30 see Figure 2. The GPS-repeater amplifies and distributes the signal indoors. Because the GPS-part in a receiver indoors will have the same GPS-signals as the outdoor unit of the building, it can appoint time/frequency and a position. Time and frequency is exact, whereas the position
35 will be slightly wrong. The appointed position, however, is

a plurality of satellites. The accessibility of the reference signal by that can be guaranteed to almost 100%, which is fundamental to the function of the communications system.

5 To sum up, there today exists a global system, GPS, which at low cost gives possibility to a very stable frequency and time reference, typically ± 100 ns, and a frequency stability of 10^{-12} . Performance varies, depending on the quality of the receiver. The cost of a GPS-receiver
10 is low even today, and it will be even lower. It is, for instance, possible to buy GPS-receivers with display for about 1000 kr in the shops. A receiver which can be used for the invention is estimated to be manufactured at a price of a few hundred kr even today, which should be
15 related to the advantages the invention will bring about.

The invention describes how frequency stability and synchronisation can be improved for a radio communications system with a satellite system, such as GPS or GLONASS, by phase locking the oscillators in radio terminals and base
20 stations to a common reference. In this way one replaces completely, or simplifies, frequency correction and clock recovery in the obtained base band signal, which normally is made by transmitted training sequences.

It should be realised that in the radio communication
25 systems of today, training sequences takes a large part of the total amount of data. For instance is in DECT used 32 bits in each time slot ("burst") of totally 388 data bits, which corresponds to 7,6 %. In HIPERLAN/1 is 450 bits used for 1 block, to maximally 47 blocks of 496 bits, which
30 corresponds to 2-47%. In the present invention these data bits instead can be used for data information, which results in an increase of capacity.

The comparatively large frequency variations which occur in the oscillators at high carrier frequency (>5 GHz)
35 are reduced, and the invention consequently also improves reliability and bit error content at transmission both from

The invention solves the problem of frequency stability by utilising a global satellite system. By that the data capacity can be increased by possibility to use more efficient modulation methods, and that better
5 performance is achieved thanks to negligible frequency and phase errors at detection. Besides no overhead (control bits; training bits) is wasted, due to synchronisation of receivers within the transmitted time slots, which is needed if no reference is accessible for the whole system.

10 Today there are two globally accessible satellite systems with possibility to get an exact position, time and frequency, namely the American GPS and the Russian GLONASS. GLONASS is rather similar to GPS, but is inferior to GPS regarding supply of receivers, so only GPS is described
15 below.

GPS consists of 24 rotating satellites and has been a tremendous success, which means that the system is used in more and more applications. To civil users the C/A-code is accessible, where a PN-code is repeated every ms with a
20 chip frequency of 1,023 MHz at 1575,42 MHz. Superimposed with a rate of 50 bit/s, system data is transmitted which i.a. contains satellite data, system time and status messages. Each satellite is equipped with 4 atomic clocks. By, in the receiver, measuring on the transmitted signals,
25 position, time and frequency can be appointed with a very high accuracy. GPS consequently makes possible access to "atomic clock performance" at any place on the globe at a very low cost.

To make a GPS-receiver to deliver an exact time is
30 required that it can lock to 4 satellites, or that the position is known and that one satellite is accessible. These conditions are always fulfilled if the receiver is placed at a high place outdoors, because it is sufficient that it once has contact with 4 satellites to appoint its
35 position (after that it is sufficient with contact with one satellite). Of course it will be an advantage to measure on

the radio communications system, a functional description of a very important component in the invention, namely the Phase-locked loop, is given. However, a definition is first given below of a number of abbreviations which are used
5 throughout in the description.

	BRAN	Broadband Radio Access Networks
	DECT	Digital Enhanced Cordless Telecommunications
	DVB	Digital Video Broadcasting
10	FDD	Frequency Division Duplexing
	GLONASS	Global Navigation Satellite System
	GPS	Global Positioning System
	HIPERLAN	High Performance Radio LAN
	IF	Intermediate Frequency
15	LMDS	Local Multipoint Distribution Service
	LO	Local Oscillator
	OFDM	Orthogonal Frequency Division Multiplex
	PLL	Phase-Locked Loop
	ppm	parts per million
20	RF	Radio Frequency
	RLL	Radio in the Local Loop
	TDD	Time Division Duplexing
	VCXO	Voltage Controlled Crystal Oscillator

25 The general problem which the invention intends to solve is the possibility to build spectrum efficient communications systems with high performance at low cost. Spectrum is a limited resource which should be utilised as efficiently as possible. By utilising a universally
30 accessible frequency/time reference, systems can be built which give high system performance, i.e. high bit/s/Hz/unit area. Several parameters must be taken into consideration in order to find good solutions of this complex optimisation problem, for instance system specifications,
35 cost/performance for components, spectrum efficiency contra cost, immunity to noise, frequency in question etc.

synchronisation of the reference equipment, i.e. the oscillators, because this is made via channels adapted to the external reference system, i.e. the satellite system.

In one embodiment according to the patent claim 4, a global satellite system, for instance GPS, is utilised, which results in high accuracy in the reference frequency and world-wide coverage.

In a preferred embodiment according to patent claim 14, a PLL is utilised to lock the oscillator frequency to the satellite frequency. The PLL is a cheap and easily obtainable component.

In another preferred embodiment according to patent claim 17, the by the PLL locked oscillator frequency is utilised to lock all local oscillators in the base station and in the radio terminal to achieve a completely coherent system.

Further characteristics of the invention are given in the other subclaims.

20 BRIEF DESCRIPTION OF THE DRAWINGS

In the following, a detailed description of an embodiment of the invention is given with reference to the enclosed drawings, of which:

- Figure 1 is a system survey of the invention;
- 25 Figure 2 is an alternative embodiment of the invention for indoor use;
- Figure 3 shows the construction of the radio frequency part in the mobile terminal, respective the base station, according to the present invention;
- 30 Figure 4 shows the construction of a phase-locked loop.

DETAILED DESCRIPTION OF AN EMBODIMENT OF THE INVENTION

In the following the radio communications system according to the invention will be described with reference to the Figures 1-4. In connection with the description of

modulation", and a plurality of carriers, so called "multi carrier modulation" is used. Impairment of the bit error content occurs when the frequency fluctuations exceeds certain maximum values, typically 1-10 ppm, depending on
5 carrier frequency and modulation.

The use of carrier frequencies above the UHF-band, probably 5-80 GHz, will increase concurrently with the need for bandwidth and a deregulated market. Cheap radio terminals for a mass market are made possible by new
10 components, but the frequency stability in the local oscillators of the terminals will be of great importance to system performance and cost.

The problem consequently is that the local oscillators in the radio terminals of today have too poor frequency
15 stability, which will impair the capacity and performance of the radio system.

The aim of the present invention is to solve this problem.

20 SUMMARY OF THE INVENTION

The above mentioned aim is achieved by a method and an arrangement at a mobile radio communications system which includes at least one radio terminal and at least one base station, at which reference equipment in said base station
25 and in said radio terminal, which influence transmission respective reception of information between said base station and said radio terminal, is synchronised to a detected time/frequency reference transmitted from an external reference system.

30 Thanks to the fact that the external reference system has high frequency stability, the local oscillators in the base station and in the radio terminal will have the same stability.

An advantage moreover is that "expensive" bandwidth
35 which is used at terrestrial radio communication between radio terminal and base station need not be utilised for

ARRANGEMENT AND METHOD AT A MOBILE RADIO
COMMUNICATIONS SYSTEM

The present invention relates to a method and an
5 arrangement at a mobile radio communications system
including at least one base station and at least one radio
terminal.

BACKGROUND OF THE INVENTION

10 The communications systems of today and of the future,
with radio based access networks, so called RLL ("Radio in
the Local Loop")-systems, need high reliability and
capacity to be a cost efficient alternative to technologies
based on copper wire, coaxial cable or optical fibre.
15 Transmission of speech, video and data with digital radio
can simplify, shorten and also make the necessary
installation of a complete infrastructure cheaper. The
demands for high transmission capacity means that advanced
modulation methods are desirable to make it possible to
20 provide the wanted capacity. Spectrum efficient modulation
methods need a high signal-to-noise ratio in the detector
of the receiver, and that the transmitted bit clock has
been recovered, so called "clock recovery", when necessary
low bit error content shall be achieved.

25 The communications systems of today are constructed to
cope with not ideal time and frequency sources in
communications equipment, which results in that much of the
potential bandwidth is lost even at the design stage. For
systems with stationary units outdoors, i.e. at places
30 where a satellite system with a stable reference
frequency/time is continuously accessible, there is a lot
of capacity and performance to be gained by the invention.

Frequency fluctuations in the local oscillator of the
receiver makes the utilisation of coherent detection more
35 difficult, i.e. knowledge of exact phase, both when
modulation of one carrier, so called "single carrier

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

which carrier frequency/frequencies that are used. By direct mixing to base band (homodyne receiver) the IF-blocks are eliminated. With carrier frequencies over 10 GHz one or more IF-stages are normally included to fulfil
5 filter requirements and other system specifications.

To sum up can be said that the most important characteristics of the invention are that:

all oscillators which are included in terminals and
10 base stations and influence transmission/reception are frequency locked to a satellite reference. The reference f_s is created both in terminals and base stations by the internal reference being locked to the detected satellite signals f_s ;

15 the communications system by that achieves higher performance by more and more spectrum efficient modulation and coherent detection being possible to use both in downlink and uplink;

20 frequency bands which have been globally set aside for satellite references are utilised, which means that valuable bandwidth is saved for communication in the frequency bands which the applications relate to.

25 The invention consequently describes a new radical way to build radio communications systems with possibility to performance improvements which, thanks to the component development, have been possible to implement at low cost.

30 The invention can in principle in easily be used for all radio systems with fixed antennas mounted outdoors. The invention is very suitable for RLL-systems where there are demands for spectrum efficient modulation and low bit error content when high carrier frequencies are used, for
35 instance LMDS (LMDS is interactive broadband radio systems which operate on frequencies over 10 GHz, typically 28 or

terminal and base station references, a frequency error is obtained which is less than 1 Hz.

Parts of the available, transmitted bandwidth can be used to train the receiver. By transmitting known
5 sequences, so called "training sequences", the receiver can be synchronised. Pilot tones is another method which can be used but will, like training sequences, take bandwidth which might be used for useful data.

It is also possible to utilise characteristic
10 qualities of the transmitted signal to "blindly" train the receiver. The method requires signal handling, but the result will not be as good as a stable frequency/time reference.

Use of a local reference signal, distributed via an
15 independent terrestrial transmission network with limited coverage, might be used as reference for radio communications systems (both base station and terminal). Local reference signals are not used, as far as we know, to synchronise terminals, and has disadvantages compared with
20 the invention. For instance is the signal not globally accessible, and is probably not of as good a quality as the GPS-system, because the American national defence is responsible for the operation.

The above discussed is only to be regarded as
25 advantageous embodiment of the invention, and the extent of protection of the invention is only limited by what is specified in the enclosed patent claims.

40 GHz, with a possibility for about 25 Mbit/s data rate to customer, and 3 Mbit/s from customer). Also distribution of terrestrial TV with OFDM can be improved with frequency and phase locking of the local oscillators of the receivers to
5 a satellite based reference system. The invention can also be used in other configurations, for instance indoors with GPS-repeaters, and for mobile radio systems, but the applications above are the most apparent.

In Europe the BRAN-project has started, which i.a.
10 shall standardise an LMDS-system. The invention can be introduced at suitable point of time in the standardisation, with possibilities for future licence receipts.

Synchronisation of radio base stations, advanced
15 measuring systems, and data networks, by means of GPS is made to an ever greater extent, due to the low price of GPS and high performance in comparison with other solutions. The invention expands the use of time and frequency references f_i from satellites to synchronise and frequency
20 lock a complete radio communications system, i.e. both base stations and terminals.

In comparison with the use of frequency stable internal reference oscillators, a lot can be gained by the invention. Internal reference oscillators with frequency
25 stability better than 0,1-1 ppm are not practically suitable because of high cost, especially for mass market production where the price is very critical. Generally the oscillators constitute a large part of the cost of the receivers. With a stability of 5-20 ppm, which is normal in
30 many standards (for instance DVB, HIPERLAN and DECT) the absolute frequency error Δf_c will be up to 100 kHz in the 5 GHz band, and 560 kHz in the 28 GHz band, which of course will contribute to impaired performance and requires expensive counter-measures. With a typical long-time
35 stability better than 10^{-11} , i.e. 0,00001 ppm, which (easily) can be attained with external satellite locking of

time/frequency reference from said satellite system, and on the other a receiver/transmitter for the terrestrial radio access network.

8. Arrangement at a mobile radio communications system including at least one base station and at least one radio terminal, characterised in that reference equipment in said base station and in said radio terminal, which influence transmission respective reception of information between said base station and said radio terminal, is synchronised to a detected time/frequency reference (f_i) transmitted from an external reference system.

9. Arrangement according to patent claim 8, characterised in that said reference equipment are oscillators.

10. Arrangement according to patent claim 8 or 9, characterised in that said external reference system is a satellite system.

11. Arrangement according to patent claim 10, characterised in that said satellite system is a global satellite system, preferably GPS or GLONASS.

12. Arrangement according to any of the patent claims 10 or 11, characterised in that said radio terminal and said base station on the one hand includes an external antenna unit for reception of the time/frequency reference (f_i) from said satellite system, and on the other another antenna unit for transmission and reception of information via the terrestrial radio access network.

13. Arrangement according to patent claim 12, characterised in that said external antenna unit is connected to a satellite detector, preferably a GPS-detector, which senses the time/frequency reference (f_i) and locks this to a controllable oscillator.

14. Arrangement according to patent claim 13,

PATENT CLAIMS

1. Method at a mobile radio communications system including at least one base station and at least one radio terminal, characterised in that reference equipment in said base station and in said radio terminal, which influence transmission respective reception of information between said base station and said radio terminal, is synchronised to a detected time/frequency reference (f_i), transmitted from an external reference system.

2. Method according to patent claim 1, characterised in that said reference equipment consists of oscillators.

3. Method according to any of the patent claims 1 or 2, characterised in that said external reference system consists of a satellite system.

4. Method according to patent claim 3, characterised in that said satellite system consists of a global satellite system, preferably GPS or GLONASS.

5. Method according to patent claim 3 or 4, characterised in that said oscillators in said radio terminal and in said base station are synchronised to the time/frequency signals (f_i) of said satellite system, and that interactive transmission of data between said base station and said radio terminal is made via the terrestrial radio access network.

6. Method according to patent claim 5, characterised in that said oscillators are phase locked (f_o) to the/from the satellite system transmitted time/frequency reference (f_i).

7. Method according to any of the patent claims 5 or 6, characterised in that said radio terminal and said base station on the one hand includes a satellite receiver, for instance GPS-receiver, for reception of the

1/4

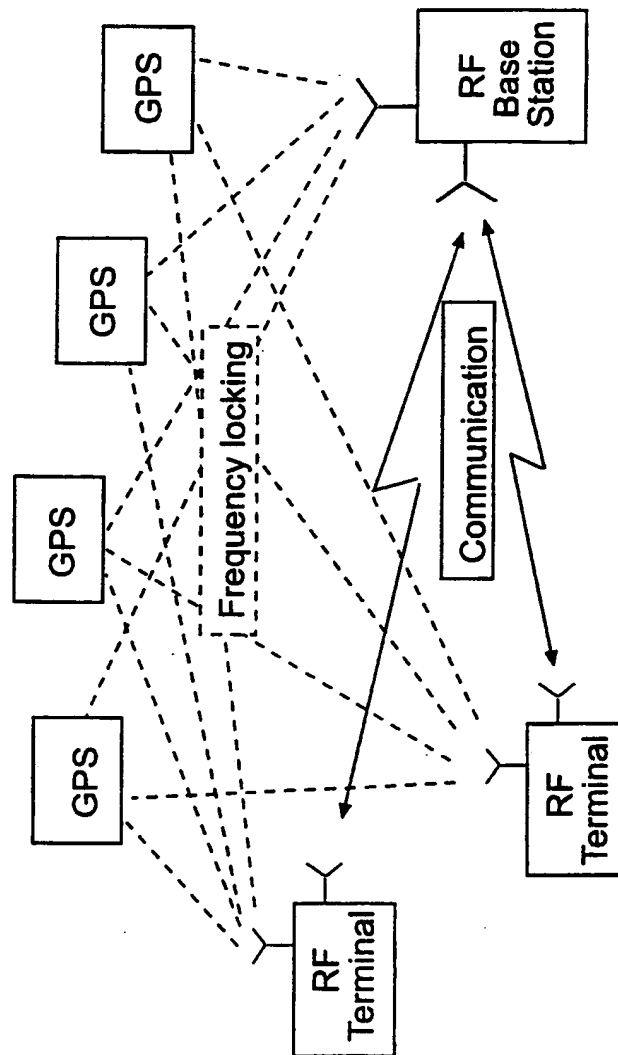
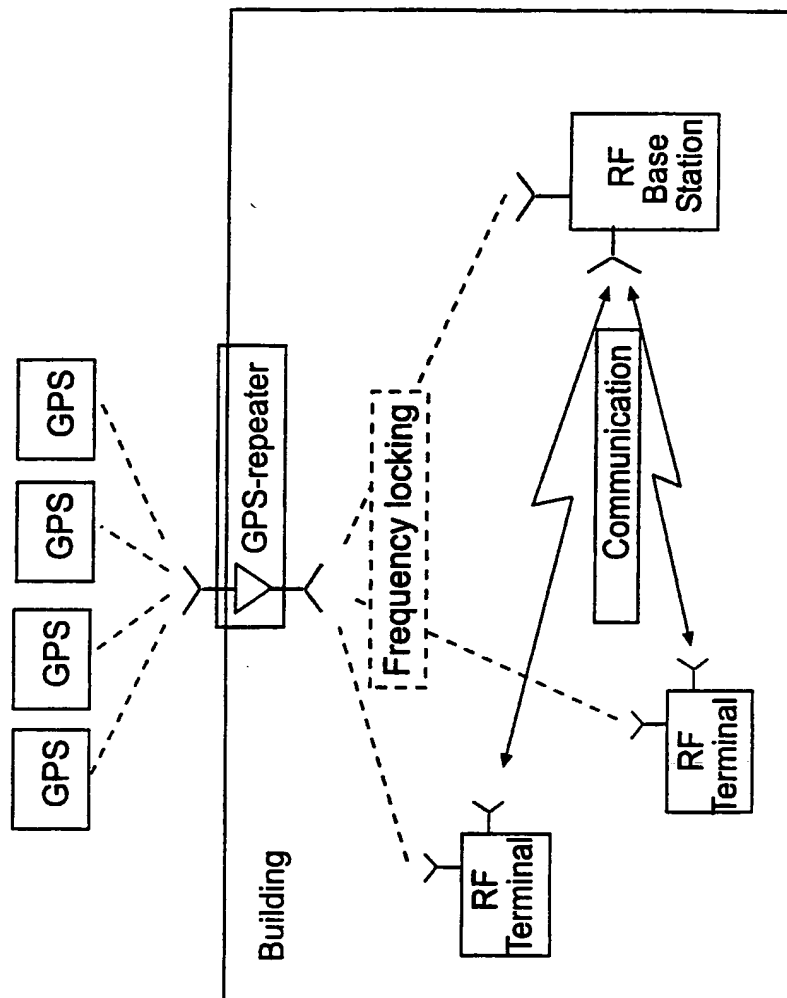


Figure 1

2/4

**Figure 2**

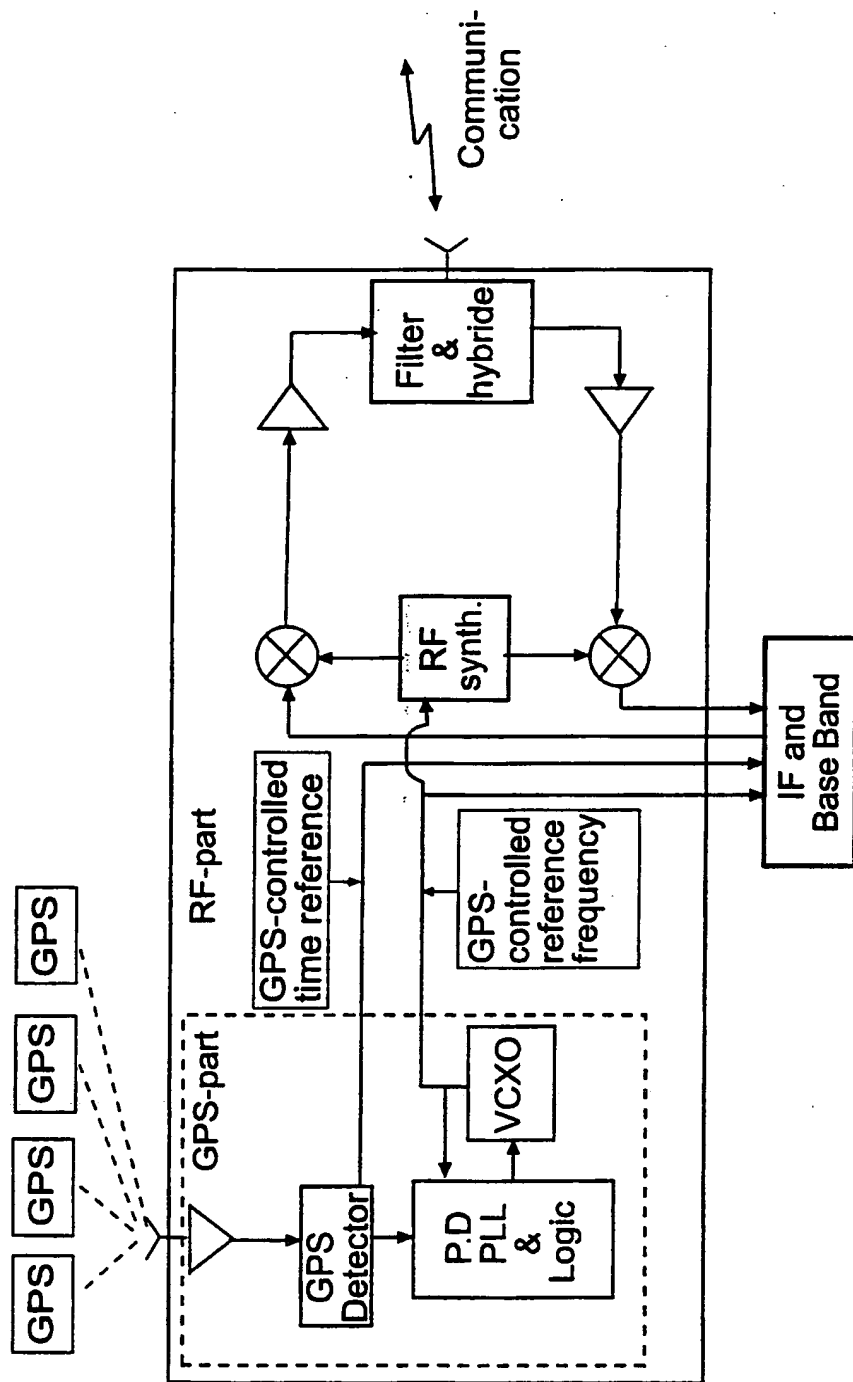


Figure 3

4/4

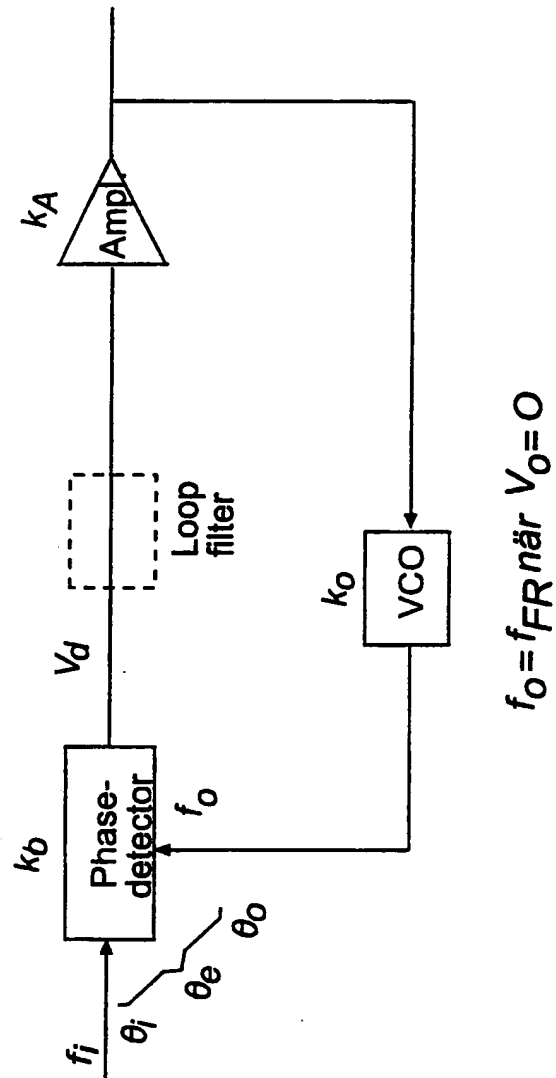


Figure 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00504

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04J 3/06, H04B 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B, H04J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5367524 A (KENNETH E. RIDEOUT, JR. ET AL), 22 November 1994 (22.11.94), column 2, line 12 - line 48; column 3, line 22 - line 37	1-5,7-11
Y	--	6,12-18
Y	US 5003272 A (DIETER J. JANTA ET AL), 26 March 1991 (26.03.91)	6
Y	US 5245634 A (NIMROD AVERBUCH), 14 Sept 1993 (14.09.93)	12-18
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 August 1999

Date of mailing of the international search report

06-09-1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Göran Magnusson/mj

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00504

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9716894 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 9 May 1997 (09.05.97), page 1, line 24 - page 2, line 19; page 4, line 2 - page 5, line 18; page 6, line 23 - line 25 -----	1-5,7-11